

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 453 112 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
01.09.2004 Bulletin 2004/36

(51) Int Cl.7: **H01L 33/00, H01S 5/323**

(21) Application number: **04011150.2**

(22) Date of filing: **07.04.1997**

(84) Designated Contracting States:
DE FR NL

(30) Priority: **26.04.1996 JP 10783396**
10.03.1997 JP 5522197

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
97302374.0 / 0 803 916

(71) Applicant: **Sanyo Electric Co., Ltd.**
Moriguchi, Osaka 570-8677 (JP)

(72) Inventors:
• **Matsushita, Yasuhiko**
Osaka-shi, Osaka-fu 544 (JP)
• **Yagi, Katsumi**
Suita-shi, Osaka-fu 565 (JP)

• **Kunisato, Tatsuya**
Takatsuki-shi, Osaka-fu 569 (JP)
• **Kano, Takashi**
Ohtsu-shi, Shiga-ken 520-21 (JP)
• **Ueda, Yashiro**
Hirakata-shi, Osaka-fu 573 (JP)

(74) Representative: **Calderbank, Thomas Roger et al**
Mewburn Ellis LLP
York House
23 Kingsway
London WC2B 6HP (GB)


Remarks:

This application was filed on 11 - 05 - 2004 as a
divisional application to the application mentioned
under INID code 62.

(54) Light emitting device and manufacturing method thereof

(57) A light emitting device includes a cladding layer composed of a III-V group nitride system semiconductor of a first conductivity type, an active layer formed on the cladding layer of the first conductivity type and composed of a III-V group nitride system semiconductor containing In, an undoped cap layer formed on the active layer and composed of a III-V group nitride system semiconductor, and a cladding layer formed on the cap layer and composed of a III-V group nitride system semiconductor of a second conductivity type.

FIG. 1

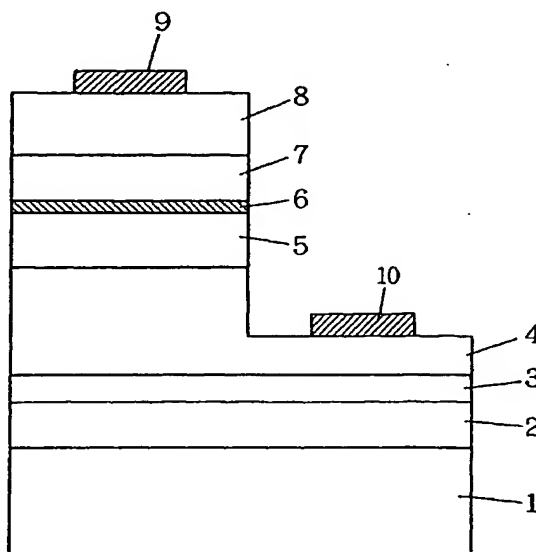

EP 1 453 112 A1

Description

[0001] The present invention relates to a light emitting device and a manufacturing method thereof.

[0002] Light emitting devices such as light emitting diodes and semiconductor laser devices which are formed of III-V group nitride system semiconductors such as GaN, AlGa_N, InGa_N and InAlGa_N are receiving a great deal of attention because they are capable of, by direct transition, light emission in the yellow to ultraviolet region, especially in the blue region, with large luminous intensity.

[0003] Fig.8 is a schematic cross-sectional view showing a conventional light emitting diode composed of III-V group nitride system semiconductors.

[0004] In Fig.8, formed in order on a sapphire substrate 101 are a GaN buffer layer 102, an n-type GaN contact layer 103 also serving as an n-type cladding layer, an InGa_N active layer 104, a p-type AlGa_N cladding layer 105, and a p-type GaN contact layer 106. A p electrode 107 is formed on the p-type GaN contact layer 106 and an n electrode 108 is formed on the n-type GaN contact layer 103.

[0005] The individual layers of this light emitting diode are grown by metal organic chemical vapor deposition (MOCVD) at the growth temperatures shown in Table 1, for example.

Table 1

Name of layer	Growth temperature (°C)
Buffer layer 102	860
N-type contact layer 103	1150
Active layer 104	860
P-type cladding layer 105	1150
P-type contact layer 106	1150

[0006] When manufacturing this light emitting diode, the p-type AlGa_N cladding layer 105 is formed on the InGa_N active layer 104 at a growth temperature higher than that for the InGa_N active layer 104 to achieve good crystallinity. The growth of the p-type AlGa_N cladding layer 105 at such a high temperature causes elimination of constituent elements such as In from the InGa_N active layer 104. The crystallinity of the InGa_N active layer 104 is thus deteriorated when crystal-growing the p-type AlGa_N cladding layer 105. This causes difficulty in achieving larger luminous intensity with the light emitting diode.

[0007] An object of the present invention is to provide a light emitting device having high luminous intensity and its manufacturing method.

[0008] A light emitting device according to the present invention includes, in this order, a first cladding layer composed of a compound semiconductor of a first conductivity type, an active layer composed of a compound semiconductor containing indium, a cap layer composed of a compound semiconductor, and a second cladding layer composed of a compound semiconductor of a second conductivity type.

[0009] In the light emitting device of the invention, formation of the cap layer on the active layer suppresses elimination of constituent elements such as indium from the active layer. This provides increased luminous intensity.

[0010] The first cladding layer may be of a nitride system semiconductor of the first conductivity type, the active layer may be of a nitride system semiconductor, the cap layer may be of a nitride system semiconductor, and the second cladding layer may be of a nitride system semiconductor of the second conductivity type.

[0011] The first cladding layer may be composed of a III-V group nitride system semiconductor of the first conductivity type, the active layer of a III-V group nitride system semiconductor, the cap layer of a III-V group nitride system semiconductor, and the second cladding layer of a III-V group nitride system semiconductor of the second conductivity type. It is preferable to form the cap layer on the entire surface of the active layer in close contact.

[0012] The active layer may be composed of an InGa_N layer. This provides remarkable effect since indium is susceptible to elimination. The cap layer may be formed of an AlGa_N layer, and is preferably formed of a GaN layer.

[0013] The cap layer of Al_uGa_{1-u}N, and the second cladding layer of Al_zGa_{1-z}N of the second conductivity type, wherein the Al composition ratio u of the cap layer is preferably smaller than the Al composition ratio z of the second cladding layer. It is preferable from the point of view of manufacturing yield that the first cladding layer is formed of GaN.

[0014] Particularly, it is more preferable that the Al composition ratio u of the cap layer is approximately 0.1 or smaller. It is more preferable that the cap layer is formed of GaN. In this case, the cap layer formed of a GaN layer suppresses elimination of constituent elements such as indium from the active layer. This provides significantly larger luminous intensity.

[0015] The cap layer preferably has a larger bandgap than the active layer. This prevents the cap layer from serving

as a light emitting region.

[0016] It is preferable that the cap layer has a bandgap intermediate between those of the active layer and the second cladding layer. This allows reduction of the operating voltage.

[0017] It is preferable that the cap layer has impurity concentration lower than that of the second cladding layer. This reduces the possibility of undesirable impurity diffusion from the cap layer side into the active layer, thus suppressing deterioration of luminous intensity due to undesirable impurity diffusion.

[0018] Particularly, it is more preferable that the cap layer is an undoped layer. This allows almost no undesirable impurity diffusion from the cap layer side into the active layer. This sufficiently suppresses luminous intensity deterioration due to undesirable impurity diffusion.

[0019] It is preferable that the cap layer has a thickness of approximately not less than 200 Å and approximately not more than 400 Å. This provides significantly increased luminous intensity.

[0020] The first cladding layer may be formed on a substrate composed of a semiconductor or an insulator with a buffer layer composed of $\text{Al}_x\text{Ga}_{1-x}\text{N}$ interposed therebetween, and the Al composition ratio x of the buffer layer is preferably larger than 0 and not larger than 1. This improves the manufacturing yield.

[0021] Particularly, it is more preferable that the Al composition ratio x of the buffer layer is 0.4 or larger, and smaller than 1. This further improves the manufacturing yield. It is still more preferable that the Al composition ratio x of the buffer layer is not less than 0.4, and not more than 0.6. This still further improves the manufacturing yield.

[0022] The light emitting device may further include an underlayer composed of $\text{Al}_y\text{Ga}_{1-y}\text{N}$ between the buffer layer and the first cladding layer, wherein the Al composition ratio y of the underlayer is preferably 0 or larger, and smaller than 1. This improves the manufacturing yield.

[0023] A method of manufacturing a light emitting device according to another aspect of the present invention includes the steps of forming an active layer composed of a compound semiconductor containing indium by a vapor phase growth method and forming a cap layer composed of a compound semiconductor on the active layer by a vapor phase growth method at a temperature approximately equal to or lower than a growth temperature for the active layer.

[0024] According to the manufacturing method of the invention, formation of the cap layer on the active layer at a growth temperature approximately equal to or lower than the growth temperature for the active layer suppresses elimination of constituent elements such as indium from the active layer. This provides larger luminous intensity.

[0025] The manufacturing method of the present invention may further include the step of forming a cladding layer composed of a compound semiconductor on the cap layer by a vapor phase growth method at a growth temperature higher than the growth temperature allowing crystal growth of the active layer.

[0026] The active layer may be composed of a nitride system semiconductor and the cap layer of a nitride system semiconductor. The cladding layer may be formed of a nitride system semiconductor of one conductivity type.

[0027] The active layer may be composed of a III-V group nitride system semiconductor and the cap layer of a III-V group nitride system semiconductor. The cladding layer may be formed of a III-V group nitride system semiconductor of one conductivity type. Particularly, the active layer may be formed of an InGaN layer. In this case, a remarkable effect is obtained since indium is susceptible to elimination.

[0028] It is preferable that the cap layer is composed of $\text{Al}_u\text{Ga}_{1-u}\text{N}$, the cladding layer is composed of $\text{Al}_z\text{Ga}_{1-z}\text{N}$ of one conductivity type, and that the Al composition ratio u of the cap layer is smaller than the Al composition ratio z of the cladding layer.

[0029] Particularly, it is preferable that the Al composition ratio u of the cap layer is approximately 0.1 or smaller. It is more preferable that the cap layer is composed of GaN. In this case, since the cap layer is formed of a GaN layer, elimination of constituent elements such as indium from the active layer is suppressed, thus providing significantly larger luminous intensity.

[0030] Particularly, it is preferable that the cap layer is an undoped layer. In this case, there is almost no possibility of diffusion of undesirable impurities from the cap layer side to the active layer side. This sufficiently suppresses deterioration of luminous intensity due to undesirable impurity diffusion.

[0031] It is preferred that the cap layer has a thickness of approximately not smaller than 200 Å and approximately not larger than 400 Å. This enables remarkable improvement of the luminous intensity.

[0032] It is preferable to form the cap layer at a growth temperature approximately equal to that for the active layer. This allows the cap layer to be continuously formed without a time interval after formation of the active layer, which considerably prevents elimination of constituent elements from the active layer.

[0033] The growth temperature for the cap layer is preferably set to a temperature which allows crystal growth of the active layer. The active layer is preferably formed at a growth temperature not lower than 700°C and not higher than 950°C. The cap layer is preferably formed at a growth temperature not lower than 700°C and not higher than 950°C.

The formation of the cap layer on the active layer at a low growth temperature suppresses elimination of constituent elements such as indium from the active layer.

[0034] It is preferable that the active layer has a quantum well structure including an InGaN quantum well layer and a GaN quantum barrier layer and the GaN quantum barrier layer is formed by a vapor phase growth method at a growth

temperature not lower than 700°C and not higher than 950°. In this case, elimination of constituent elements such as indium from the InGaN quantum well layer is suppressed, thus enabling larger luminous intensity. An InGaN having an In composition ratio lower than that of the quantum well layer may be used as the quantum barrier layer.

[0035] A method of manufacturing a light emitting device according to still another aspect of the present invention includes the steps of forming a first cladding layer composed of a compound semiconductor of a first conductivity type by a vapor phase growth method, forming an active layer composed of a compound semiconductor containing indium by a vapor phase growth method on the first cladding layer, forming a cap layer composed of a compound semiconductor on the active layer by a vapor phase growth method at a growth temperature approximately equal to or lower than a temperature allowing vapor phase growth of the active layer, and forming a second cladding layer composed of a compound semiconductor of a second conductivity type on the cap layer by a vapor phase growth method at a temperature higher than the temperature allowing vapor phase growth of the active layer.

[0036] The first cladding layer may be composed of a nitride system semiconductor of the first conductivity type, the active layer of a nitride system semiconductor, the cap layer of a nitride system semiconductor, and the second cladding layer of a nitride system semiconductor of the second conductivity type.

[0037] The first cladding layer may be formed of a III-V group nitride system semiconductor of the first conductivity type, the active layer of a III-V group nitride system semiconductor, the cap layer of a III-V group nitride system semiconductor, and the second cladding layer of a III-V group nitride system semiconductor of the second conductivity type.

[0038] It is preferable to form a buffer layer composed of a non-single-crystal III-V group nitride system semiconductor and a single-crystal underlayer composed of an undoped III-V group nitride system semiconductor in this order on a substrate and then perform crystal growth for the first cladding layer, the active layer, the cap layer and the second cladding layer. It is preferable that the buffer layer is formed of AlGaIn. The buffer layer may be formed of AlN. The underlayer is preferably formed of GaN and the underlayer may be formed of AlGaIn.

[0039] These and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

[0040] In the drawings

Fig.1 is a schematic cross-sectional diagram of a light emitting diode according to a first embodiment of the present invention.

Fig.2 is a schematic cross-sectional diagram of a light emitting diode according to a third embodiment of the present invention.

Fig.3 is a schematic cross-sectional diagram of a semiconductor laser device according to a fourth embodiment of the present invention.

Fig.4 is a schematic cross-sectional diagram of a semiconductor laser device according to a fifth embodiment of the present invention.

Fig.5 is a schematic cross-sectional diagram of a semiconductor laser device according to a sixth embodiment of the present invention.

Fig.6 is a schematic cross-sectional diagram showing an example of a structure to which the present invention can be applied.

Fig.7 is a schematic cross-sectional diagram showing another example of a structure to which the present invention is applicable.

Fig.8 is a schematic cross-sectional diagram of a conventional light emitting diode.

[0041] A light emitting diode composed of III-V group nitride system semiconductors according to a first embodiment of the present invention will now be described in detail referring to Fig.1.

[0042] In Fig.1, formed in order on a sapphire insulating substrate 1 are a 110-Å-thick undoped $\text{Al}_x\text{Ga}_{1-x}\text{N}$ ($x=0.5$) buffer layer 2, a 0.2-μm-thick undoped GaN underlayer 3, a 4-μm-thick Si-doped n-type GaN contact layer 4 also serving as an n-type cladding layer, and a 0.2-μm-thick Zn- and Si-doped $\text{In}_q\text{Ga}_{1-q}\text{N}$ ($q=0.05$) active layer 5. Formed in order on the InGaIn active layer 5 are a 200-Å-thick undoped GaN cap layer 6 for preventing crystal deterioration of the active layer 5, a 0.15-μm-thick Mg-doped p-type $\text{Al}_z\text{Ga}_{1-z}\text{N}$ ($z=0.2$) cladding layer 7, and a 0.3-μm-thick Mg-doped p-type GaN contact layer 8.

[0043] The part from the p-type GaN contact layer 8 to a certain position in the n-type GaN contact layer 4 is removed, so that the n-type GaN contact layer 4 is exposed. A p electrode 9 composed of Au is formed on the upper surface of the p-type GaN contact layer 8 and an n electrode 10 composed of Al is formed on the n electrode formation region where the n-type GaN contact layer 4 is exposed.

[0044] A method of manufacturing the above-described light emitting diode will be explained. In this embodiment, the individual layers are formed by metal organic chemical vapor deposition (MOCVD).

[0045] First, the substrate 1 is placed in a metal organic chemical vapor deposition apparatus. Then, with the sub-

strate 1 held at a non-single crystal growth temperature, e.g., a growth temperature (a substrate temperature) of 600°C, the non-single-crystal undoped AlGaIn buffer layer 2 is grown on the substrate 1 by using H₂ and N₂ as carrier gas and ammonia, trimethylgallium (TMG) and trimethylaluminum (TMA) as material gas.

[0046] Subsequently, with the substrate 1 held at a single crystal growth temperature, or a growth temperature preferably of 1000-1200°C, e.g., 1150°C, the single-crystal undoped GaN underlayer 3 is grown on the buffer layer 2 by using H₂ and N₂ as carrier gas and ammonia and trimethylgallium (TMG) as material gas.

[0047] Then with the substrate 1 held at a single crystal growth temperature, or a growth temperature preferably of 1000-1200°C, e.g., 1150°C, the single-crystal Si-doped n-type GaN contact layer 4 is grown on the underlayer 3 by using H₂ and N₂ as carrier gas, ammonia and trimethylgallium (TMG) as material gas, and SiH₄ as dopant gas.

[0048] Next, with the substrate 1 held at a single crystal growth temperature, or preferably at a growth temperature of 700-950°C, e.g., at 860°C, the single-crystal Si- and Zn-doped InGaIn active layer 5 is grown on the n-type contact layer 4 by using H₂ and N₂ as carrier gas, ammonia, triethylgallium (TEG) and trimethylindium (TMI) as material gas, and SiH₄ and diethylzinc (DEZ) as dopant gas.

[0049] Subsequently, with the substrate 1 held at a temperature equal to or lower than the growth temperature for the active layer 5, or at 860°C in this embodiment, the single-crystal undoped GaN cap layer 6 is grown on the InGaIn active layer 5 continuously following the growth of the active layer 5 by using H₂ and N₂ as carrier gas, and ammonia and trimethylgallium (TMG) as material gas. Triethylgallium (TEG) may be used in place of trimethylgallium (TMG).

[0050] Then with the substrate 1 held at a single crystal growth temperature, i.e., preferably at a growth temperature of 1000-1200°C, e.g., at 1150°C, the single-crystal Mg-doped p-type AlGaIn cladding layer 7 is grown on the GaN cap layer 6 by using H₂ and N₂ as carrier gas, ammonia, trimethylgallium (TMG) and trimethylaluminum (TMA) as material gas, and Cp₂Mg (cyclopentadienylmagnesium) as dopant gas.

[0051] Next, with the substrate 1 held at a single crystal growth temperature, i.e., preferably at a growth temperature of 1000-1200°C, e.g., at 1150°C, the single-crystal Mg-doped p-type GaN contact layer 8 is grown on the p-type cladding layer 7 by using H₂ and N₂ as carrier gas, ammonia and trimethylgallium (TMG) as material gas, and Cp₂Mg (cyclopentadienylmagnesium) as dopant gas.

[0052] After the crystal growth, the substrate 1 is taken out from the apparatus and the part from the p-type contact layer 8 to the midway in the n-type contact layer 4 is removed by reactive ion beam etching (RIE) to form the n electrode formation region in which the n-type contact layer 4 is exposed.

[0053] Then a heat treatment is performed at 750-800°C for 30-60 minutes in an atmosphere of nitrogen to activate the dopants in the p-type contact layer 8 and the p-type cladding layer 7 to obtain high carrier concentration and to correct crystal deterioration in the n-type contact layer 4 caused by the etching.

[0054] Then the p electrode 9 composed of Au is formed by evaporation, or the like, on the p-type contact layer 8 and the n electrode 10 composed of Al is formed by evaporation or the like on the n electrode formation region of the n-type contact layer 4. A heat treatment at 500°C is then applied to cause the p electrode 9 and the n electrode 10 to come into ohmic contact with the p-type contact layer 8 and the n-type contact layer 4, respectively, to form the light emitting diode shown in Fig.1.

[0055] This light emitting diode, having the undoped GaN cap layer 6 in close contact with the InGaIn active layer 5, prevents elimination of constituent elements such as In from the InGaIn active layer 5 in or after formation of the active layer 5. This reduces the number of crystal defects in the active layer 5, suppressing deterioration of the crystallinity.

[0056] Furthermore, it is thought that undesirable impurity diffusion into the active layer 5 is suppressed since it has a less number of crystal defects.

[0057] Moreover, since the GaN cap layer 6 of this embodiment is a so-called undoped layer formed without intentional use of dopant, undesirable impurity diffusion into the InGaIn active layer 5 is sufficiently suppressed.

[0058] As discussed above, in this embodiment, the effect of suppressing impurity diffusion into the active layer 5 produced because the number of crystal defects in the active layer 5 is reduced by suppressing elimination of constituent elements from the active layer 5 and the effect of suppressing impurity diffusion into the active layer 5 produced because the cap layer 6 is an undoped layer remarkably suppress undesirable impurity diffusion into the active layer 5.

[0059] Accordingly, while light emitting diodes having the same structure as this embodiment except that they have no cap layer 6 suffer from large variations in light emission wavelength, no light emission or low light emission, the light emitting diode of this embodiment achieves small variations in the light emission wavelength and considerably increased luminous intensity.

[0060] Particularly, when manufacturing the light emitting diode of this embodiment, the undoped GaN cap layer 6 is grown right on the entire surface of the InGaIn active layer 5 at a temperature not higher than the growth temperature for the InGaIn active layer 5. This not only prevents elimination of constituent elements of the InGaIn active layer 5 when forming the cap layer 6 but also prevents elimination of constituent elements from the InGaIn active layer 5 after formation of the cap layer 6. Accordingly, the manufacturing method of this embodiment is desirable.

[0061] Especially, in this embodiment, continuously growing the InGaIn active layer 5 and the GaN cap layer 6 at approximately equal growth temperatures sufficiently suppresses elimination of constituent elements from the InGaIn

active layer 5 and mass productivity is improved.

[0062] With the aforementioned structure, the luminous intensity was 340 (arbitrary unit) with a 200-Å-thick GaN cap layer 6. With a 100-Å-thick GaN cap layer 6, the luminous intensity was 36 (arbitrary unit). This is larger than that of a structure having no cap layer 6, but is about one-tenth that of the 200-Å-thick cap layer 6. With a 300-Å-thick GaN cap layer 6, the luminous intensity was 1.4 times that of the 200-Å-thick one, and with a 400-Å-thick GaN cap layer 6, it was 0.8 times that of the 200-Å-thick one.

[0063] This suggests that a preferable effect is obtained when the GaN cap layer 6 has a thickness between 200-400 Å, or that it is preferable that the GaN cap layer 6 has a thickness large enough to cause almost no quantum effect.

[0064] In this embodiment, the non-single-crystal AlGaIn buffer layer 2 is formed on the substrate 1 and then the undoped GaN single-crystal underlayer 3 is formed under single crystal growth conditions. This easily provides the underlayer 3 with remarkably improved surface conditions, which suppresses leakage current of the device and increases manufacturing yield of the devices.

[0065] When a GaN layer is used as the non-single-crystal buffer layer 2, it is likely to suffer from pits in the surface, which may lead to through defects. It is therefore undesirable to use a GaN layer as the buffer layer 2 from the point of view of the manufacturing yield. As a non-single crystal buffer layer 2 used in combination with the undoped single-crystal underlayer 3, use of an AlN layer is preferable in the point of view of the manufacturing yield, and the use of an AlGaIn layer is the most desirable.

[0066] The surface conditions and FWHM (Full Width Half Maximum) of X-ray diffraction spectrum were measured with AlGaIn layers having various Al composition ratios. Table 2 below shows the measurements.

Table 2

Al composition	Surface conditions	X-ray FWHM (arcsec)
1.0	good	550
0.8	good	504
0.6	good	451
0.4	good	390
0.2	many pits	428
0	many pits	unknown

[0067] The results in Table 2 show that it is desirable that the AlGaIn layer has an Al composition ratio of 0.4 or greater, and smaller than 1, and more desirably, not smaller than 0.4 nor larger than 0.6.

[0068] As the undoped single-crystal underlayer 3, an AlGaIn layer may be used in place of the GaN layer, but an AlN layer is not preferable because it is likely to suffer from cracking on the surface.

[0069] Next, a light emitting diode formed of III-V group nitride system semiconductors in a second embodiment of the present invention will be described.

[0070] This embodiment differs from the first embodiment in that it uses a 200-Å-thick undoped $\text{Al}_u\text{Ga}_{1-u}\text{N}$ layer as the cap layer 6 in place of the undoped GaN layer. The value of u is approximately 0.1 and 0.2. This $\text{Al}_u\text{Ga}_{1-u}\text{N}$ layer, too, is formed by MOCVD at the same temperature as the growth temperature for the active layer 5, at 860°C in this embodiment. H_2 and N_2 are used as carrier gas and ammonia, trimethylgallium (TMG) and trimethylaluminum (TMA) are used as material gas. Triethylgallium (TEG) may be used instead of trimethylgallium (TMG).

[0071] It was seen that the light emitting diode of this embodiment also provides remarkably larger luminous intensity than a light emitting diode having no cap layer 6.

[0072] However, as compared with the 200-Å-thick undoped GaN cap layer 6 in the first embodiment regarded as providing a luminous intensity of 450 (arbitrary unit), an undoped $\text{Al}_u\text{Ga}_{1-u}\text{N}$ cap layer 6 with an Al composition ratio u of about 0.1 in the second embodiment provided a luminous intensity smaller than half thereof, 190 (arbitrary unit).

[0073] With an undoped $\text{Al}_u\text{Ga}_{1-u}\text{N}$ cap layer 6 having an Al composition ratio u of about 0.2, the luminous intensity was one-third that for the Al composition ratio u of 0.1.

[0074] This shows that it is the most preferable to use a GaN layer as the cap layer 6 and that when using an $\text{Al}_u\text{Ga}_{1-u}\text{N}$ layer, a small Al composition ratio u as 0.1 is preferable. The larger an Al composition ratio is, the larger the bandgap of an AlGaIn is. The Al composition ratio of the p-type cladding layer 7 is 0.2 as described in the first embodiment. When the Al composition ratio of the cap layer 6 is 0.1, the bandgap of the cap layer 6 is smaller than that of the p-type cladding layer 7. From this, it is understood that it is preferable that the cap layer 6 has a bandgap between that of the active layer 5 and that of the p-type cladding layer 7.

[0075] Next, a light emitting diode composed of III-V group nitride system semiconductors in a third embodiment of

the invention will be described referring to Fig.2.

[0076] This embodiment differs from the first embodiment in that it uses no GaN underlayer 3, whose manufacturing method is the same as that in the first embodiment except that it excludes the process step for forming the GaN underlayer 3.

[0077] While the light emitting diode of this embodiment provides lower yield than the light emitting diode of the first embodiment, it achieves larger luminous intensity than a light emitting diode having no cap layer 6.

[0078] Although the light emitting diodes of the above-described embodiments have the active layer 5 on the n-type contact layer 4, an n-type AlGaIn cladding layer may be provided between the n-type contact layer 4 and the active layer 5. An n-type AlGaIn cladding layer and an n-type InGaIn layer may be provided between the n-type contact layer 4 and the active layer 5.

[0079] The aforementioned embodiments use an active layer with a non-quantum-well structure as the active layer 5, rather than a quantum-well structure. However, needless to say, an active layer with a single-quantum-well structure or a multi-quantum-well structure may be used. For example, the active layer 5 may have a single-quantum-well structure formed of an $\text{In}_s\text{Ga}_{1-s}\text{N}$ ($1>s>0$) quantum well layer, or a multi-quantum-well structure formed of an $\text{In}_s\text{Ga}_{1-s}\text{N}$ ($1>s>0$) quantum well layer and an $\text{In}_r\text{Ga}_{1-r}\text{N}$ ($1>s>r>0$) quantum barrier layer.

[0080] When using a multi-quantum-well structure formed of an $\text{In}_s\text{Ga}_{1-s}\text{N}$ ($1>s>0$) quantum well layer and a GaN quantum barrier layer, it is preferable to form the GaN quantum barrier layer at a growth temperature not lower than 700°C nor higher than 950°C, and it is also preferable to grow the quantum well layer and the quantum barrier layer at approximately equal growth temperatures.

[0081] Although the light emitting diodes of the embodiments use an Si- and Zn-doped active layer 5, an undoped active layer may be used.

[0082] Next, an index guided semiconductor laser device in a fourth embodiment of the present invention will be explained referring to Fig.3. This semiconductor laser device is a self-aligned semiconductor laser device.

[0083] In Fig.3, formed in order on a sapphire insulating substrate 11 are an undoped AlGaIn buffer layer 12 with a thickness of about 100-200 Å, an undoped GaN underlayer 13 with a thickness of 0.4 μm, an n-type GaN contact layer 14 with a thickness of 4 μm, and an n-type AlGaIn cladding layer 15 with a thickness of 0.1-0.5 μm. Formed in order on the n-type AlGaIn cladding layer 15 are an InGaIn active layer 16, an undoped GaN cap layer 17 with a thickness of 200-400 Å, and a p-type AlGaIn cladding layer 18 with a thickness of 0.1-0.5 μm.

[0084] An n-type GaN or n-type AlGaIn current blocking layer 19 with a thickness of 0.2-0.3 μm having a stripe-like opening in the center part is formed on the p-type AlGaIn cladding layer 18. A p-type GaN contact layer 20 having a thickness of 0.1-0.5 μm is formed on the top surface and in the stripe-like opening of the n-type current blocking layer 19.

[0085] A p electrode 21 is formed on the p-type GaN contact layer 20 and an n electrode 22 is formed on the n-type GaN contact layer 14.

[0086] As the active layer 16, a non-quantum-well structure layer may be used, or a single-quantum-well structure layer or a multi-quantum-well layer may be used. In the case of a non-quantum-well structure layer, the thickness is set to about 0.1 to 0.3 μm. In the case of a single-quantum-well structure layer, the thickness of the quantum well layer is set to 10-50 Å, and in the case of a multi-quantum-well structure layer, the thickness of the quantum well layer is set to 10-50 Å and the thickness of the quantum barrier layer is set to about 10-100 Å.

[0087] This semiconductor laser device is manufactured by performing crystal growth once by using chemical vapor deposition, such as MOCVD. When manufacturing, the undoped AlGaIn buffer layer 12 is formed at a growth temperature of 600°C, the undoped GaN underlayer 13, the n-type GaN contact layer 14 and the n-type AlGaIn cladding layer 15 are formed at a growth temperature of 1150°C, the InGaIn active layer 16 and the GaN cap layer 17 are formed at a growth temperature of 700-950°C, and the p-type AlGaIn cladding layer 18, the n-type current blocking layer 19 and the p-type GaN contact layer 20 are formed at a growth temperature of 1150°C.

[0088] The semiconductor laser device of this embodiment also provides larger luminous intensity than a semiconductor laser device having no cap layer 17.

[0089] Next, an index guided semiconductor laser device according to a fifth embodiment of the invention will be explained referring to Fig.4. This semiconductor laser device is a ridge-buried type semiconductor laser device.

[0090] In Fig.4, formed in order on a sapphire insulating substrate 31 are an undoped AlGaIn buffer layer 32 with a thickness of 100-200 Å, an undoped GaN underlayer 33 with a thickness of 0.4 μm, an n-type GaN contact layer 34 with a thickness of 4 μm, and an n-type AlGaIn cladding layer 35 with a thickness of 0.1-0.5 μm. Formed in order on the n-type AlGaIn cladding layer 35 are an InGaIn active layer 36, an undoped GaN cap layer 37 with a thickness of 200-400 Å, and a p-type AlGaIn cladding layer 38 with a thickness of 0.1-0.5 μm. The InGaIn active layer 36 has the same structure and thickness as the InGaIn active layer 16 in the fourth embodiment.

[0091] The p-type AlGaIn cladding layer 38 has a flat region and a ridge region formed in the center of the flat region. A p-type GaN cap layer 39 having a thickness of 0.1 μm is formed on the ridge region of the p-type AlGaIn cladding layer 38. An n-type GaN or n-type AlGaIn current blocking layer 40 having a thickness of 0.2-0.3 μm is formed on the upper surface of the flat region and the side surfaces of the ridge region of the p-type AlGaIn cladding layer 38 and on

the side surfaces of the p-type cap layer 39. A p-type GaN contact layer 41 having a thickness of 0.1-0.5 μm is formed on the p-type cap layer 39 and the n-type current blocking layer 40.

[0092] A p electrode 42 is formed on the p-type GaN contact layer 41 and an n electrode 43 is formed on the n-type GaN contact layer 34.

[0093] This semiconductor laser device is manufactured by performing crystal growth three times by using chemical vapor deposition such as MOCVD. When manufacturing, the undoped AlGaIn buffer layer 32 is formed at a growth temperature of 600°C, the undoped GaN underlayer 33, the n-type GaN contact layer 34 and the n-type AlGaIn cladding layer 35 are formed at a growth temperature of 1150°C, the InGaIn active layer 36 and the undoped GaN cap layer 37 are formed at a growth temperature of 700-950°C, and the n-type AlGaIn cladding layer 38, the p-type cap layer 39, the n-type current blocking layer 40 and the p-type GaN contact layer 41 are formed at a growth temperature of 1150°C.

[0094] The semiconductor laser device of this embodiment also provides larger luminous intensity than a semiconductor laser device having no cap layer 37.

[0095] Next, a gain guided semiconductor laser device according to a sixth embodiment of the invention will be described referring to Fig.5.

[0096] In Fig.5, formed in order on a sapphire insulating substrate 51 are an undoped AlGaIn buffer layer 52 having a thickness of 100-200 Å, an undoped GaN underlayer 53 having a thickness of 0.4 μm , an n-type GaN contact layer 54 having a thickness of 4 μm , and an n-type AlGaIn cladding layer 55 having a thickness of 0.1-0.5 μm .

[0097] Formed in order on the n-type AlGaIn cladding layer 55 are an InGaIn active layer 56, an undoped GaN cap layer 57 having a thickness of 200-400 Å, a p-type AlGaIn cladding layer 58 having a thickness of 0.1-0.5 μm , and a p-type GaN contact layer 59 having a thickness of 0.1-0.5 μm . The InGaIn active layer 56 has the same structure and thickness as the InGaIn active layer 16 in the fourth embodiment.

[0098] An SiO₂, SiN, or n-type GaN current blocking layer 60 having a stripe-like opening in the center is formed on the p-type GaN contact layer 59. A p electrode 61 is formed on the p-type GaN contact layer 59 and an n electrode 62 is formed on the n-type GaN contact layer 54.

[0099] The semiconductor laser device of this embodiment is formed by performing crystal growth once by using chemical vapor deposition such as MOCVD. When manufacturing, the undoped AlGaIn buffer layer 52 is formed at a growth temperature of 600°C, the undoped GaN underlayer 53, the n-type GaN contact layer 54 and the n-type AlGaIn cladding layer 55 are formed at a growth temperature of 1150°C, the InGaIn active layer 56 and the undoped GaN cap layer 57 are formed at a growth temperature of 700-950°C, and the p-type AlGaIn cladding layer 58 and the p-type GaN contact layer 59 are formed at a growth temperature of 1150°C.

[0100] The semiconductor laser device of this embodiment, too, provides larger luminous intensity than a semiconductor laser device having no cap layer 57.

[0101] Although the first to sixth embodiments have shown light emitting devices having semiconductor layers on an insulating substrate, the present invention can be similarly applied to light emitting devices having semiconductor layers on a conductive substrate such as an SiC substrate and electrodes on the top surface of the uppermost layer of the semiconductor layers and on the lower surface of the substrate.

[0102] Although an active layer, a cap layer and a p-type cladding layer are formed in this order on an n-type cladding layer in the structures explained above, an active layer, a cap layer and an n-type cladding layer may be formed in this order on a p-type cladding layer. That is to say, the individual layers in the first to sixth embodiments may have the opposite conductivity types.

[0103] The first to sixth embodiments have described applications of this invention to light emitting devices such as light emitting diodes and semiconductor laser devices, but the present invention is also applicable to semiconductor devices having a compound semiconductor laser containing In such as field effect transistors.

[0104] With the structure shown in Fig.6, for example, an n-type AlGaIn layer 72 and an InGaIn layer 73 are formed in order on an n-type GaN layer 71 and a p-type SiC layer 75 is formed above the InGaIn layer 73 with an undoped GaN cap layer 74 therebetween. In this case, the InGaIn layer 73 and the GaN cap layer 74 are formed at a growth temperature of 700-950°C and the p-type SiC layer 75 is formed at a growth temperature of 1300-1500°C. In this example, as well, formation of the undoped GaN cap layer 74 on the InGaIn layer 73 suppresses elimination of constituent elements such as In from the InGaIn layer 73.

[0105] In the structure of Fig.7, an InGaIn layer 82 is formed on an n-type SiC layer 81 and a p-type SiC layer 84 is formed above the InGaIn layer 82 with an undoped GaN cap layer 83 therebetween. In this case, as well, the InGaIn layer 82 and the undoped GaN cap layer 83 are formed at a growth temperature of 700-950°C and the p-type SiC layer 84 is formed at a growth temperature of 1300-1500°C. In this example, as well, formation of the undoped GaN cap layer 83 on the InGaIn layer 82 suppresses elimination of constituent elements such as In from the InGaIn layer 82.

[0106] The light emitting diodes of the first to third embodiments can be applied to light sources for use in optical fiber communication systems, light sources for use in photocouplers, monochromatic or polychromatic pilot lamps, light sources for use in display devices such as digital displays, level meters and displays, light sources for use in facsimile devices, printer heads, signal lamps, lamps for use in automobiles such as high-beam lamps, liquid-crystal

televisions, back-light sources for use in liquid-crystal displays, amusement systems, and so on.

[0107] The semiconductor laser devices of the fourth to sixth embodiments can be applied to laser surgical knives, light sources for use in optical communication systems, light sources for use in optical pick-up devices in disk systems for DVD (Digital Video Disk) and the like, light sources for use in color laser beam printers, light sources for use in laser processing devices, light sources for laser holographies, light sources for laser displays, light sources for amusement systems, and so on.

[0108] While the invention has been described in detail, the foregoing description is in all aspects illustrative and not restrictive. It is understood that numerous other modifications and variations can be devised without departing from the scope of the invention.

[0109] Further features of the invention are discussed in the following clauses:

1 A light emitting device comprising, in this order:

a first cladding layer composed of a compound semiconductor of a first conductivity type;
an active layer composed of a compound semiconductor containing indium;
a cap layer composed of a compound semiconductor; and
a second cladding layer composed of a compound semiconductor of a second conductivity type.

2 The light emitting device according to clause 1, wherein

said first cladding layer is composed of a nitride system semiconductor of the first conductivity type,
said active layer is composed of a nitride system semiconductor,
said cap layer is composed of a nitride system semiconductor, and
said second cladding layer is composed of a nitride system semiconductor of the second conductivity type.

3 The light emitting device according to clause 2, wherein

said first cladding layer is composed of a III-V group nitride system semiconductor of the first conductivity type,
said active layer is composed of a III-V group nitride system semiconductor,
said cap layer is composed of a III-V group nitride system semiconductor, and
said second cladding layer is composed of a III-V group nitride system semiconductor of the second conductivity type.

4 The light emitting device according to clause 1, wherein said active layer is composed of InGaN.

5 The light emitting device according to clause 4, wherein

said cap layer is composed of $\text{Al}_u\text{Ga}_{1-u}\text{N}$, and
said second cladding layer is composed of $\text{Al}_z\text{Ga}_{1-z}\text{N}$ of the second conductivity type,
wherein the Al composition ratio u of said cap layer is smaller than the Al composition ratio z of said second cladding layer.

6 The light emitting device according to clause 5, wherein the Al composition ratio u of said cap layer is approximately 0.1 or smaller.

7 The light emitting device according to clause 6, wherein said cap layer is composed of GaN.

8 The light emitting device according to clause 1, wherein said cap layer has a larger bandgap than said active layer.

9 The light emitting device according to clause 8, wherein said cap layer has a bandgap intermediate between that of said active layer and that of said second cladding layer.

10 The light emitting device according to clause 1, wherein said cap layer has a lower impurity concentration than said second cladding layer.

11 The light emitting device according to clause 10, wherein said cap layer is an undoped layer.

12 The light emitting device according to clause 1, wherein said cap layer has a thickness of approximately not smaller than 200 Å and approximately not larger than 400 Å.

13 The light emitting device according to clause 1, wherein said first cladding layer is formed on a substrate com-

posed of a semiconductor or an insulator with a buffer layer composed of $\text{Al}_x\text{Ga}_{1-x}\text{N}$ interposed therebetween, the Al composition ratio x of said buffer layer being larger than 0, and not larger than 1.

14 The light emitting device according to clause 13, wherein the Al composition ratio x of said buffer layer is not smaller than 0.4, and smaller than 1.

15 The light emitting device according to clause 14, wherein the Al composition ratio x of said buffer layer is not smaller than 0.4 nor larger than 0.6.

16 The light emitting device according to clause 13, further comprising an underlayer composed of $\text{Al}_y\text{Ga}_{1-y}\text{N}$ between said buffer layer and said first cladding layer, the Al composition ratio y of said underlayer being not smaller than 0, and smaller than 1.

17 A method of manufacturing a light emitting device, comprising the steps of:

forming an active layer composed of a compound semiconductor containing indium by a vapor phase growth method; and
forming a cap layer composed of a compound semiconductor on said active layer by a vapor phase growth method at a growth temperature approximately equal to or lower than a growth temperature for said active layer.

18 The method of manufacturing a light emitting device according to clause 17, wherein said active layer is composed of a nitride system semiconductor, and said cap layer is composed of a nitride system semiconductor.

19 The method of manufacturing a light emitting device according to clause 18, wherein said active layer is composed of a III-V group nitride system semiconductor, and said cap layer is composed of a III-V group nitride system semiconductor.

20 The method of manufacturing a light emitting device according to clause 19, further comprising the step of forming a cladding layer composed of a compound semiconductor on said cap layer by a vapor phase growth method at a growth temperature higher than the temperature allowing crystal growth of said active layer.

21 The method of manufacturing a light emitting device according to clause 20, wherein said cladding layer is composed of a nitride system semiconductor of one conductivity type.

22 The method of manufacturing a light emitting device according to clause 21, wherein said cladding layer is composed of a III-V group nitride system semiconductor of one conductivity type.

23 The method of manufacturing a light emitting device according to clause 22, wherein said cap layer is composed of $\text{Al}_u\text{Ga}_{1-u}\text{N}$, said cladding layer is composed of $\text{Al}_z\text{Ga}_{1-z}\text{N}$ of one conductivity type, and the Al composition ratio u of said cap layer is smaller than the Al composition ratio z of said cladding layer.

24 The method of manufacturing a light emitting device according to clause 23, wherein the Al composition ratio u of said cap layer is approximately equal to or smaller than 0.1.

25 The method of manufacturing a light emitting device according to clause 17, wherein said cap layer is an undoped layer.

26 The method of manufacturing a light emitting device according to clause 17, wherein said cap layer has a thickness of approximately not smaller than 200 Å nor larger than 400 Å.

27 The method of manufacturing a light emitting device according to clause 17, wherein the step of forming said cap layer includes forming said cap layer at a growth temperature of not lower than 700°C nor higher than 950°C.

28 The method of manufacturing a light emitting device according to clause 17, wherein said step of forming said cap layer includes forming said cap layer at a growth temperature approximately equal to the growth temperature for said active layer.

29 The method of manufacturing a light emitting device according to clause 17, wherein said active layer is composed of InGaN.

30 The method of manufacturing a light emitting device according to clause 17, wherein said active layer has a quantum well structure including an InGaN quantum well layer and a GaN quantum barrier layer, and the step of forming said active layer includes forming said GaN quantum barrier layer at a growth temperature of not lower than 700°C nor higher than 950°C.

Claims

1. A light emitting device comprising, in the following order:

a buffer layer composed of a nitride based compound semiconductor;
 an underlayer composed of a nitride based compound semiconductor;
 a first cladding layer composed of a nitride based compound semiconductor of a first conductivity type;
 an active layer composed of a nitride based compound semiconductor containing indium;
 a cap layer composed of a nitride based compound semiconductor; and
 a second cladding layer composed of a nitride based compound semiconductor of a second conductivity type, said cap layer being composed of AlGaIn.

2. The light emitting device according to claim 1, wherein said cap layer is a layer suppressing elimination of the indium from said active layer.

3. The light emitting device according to claim 1, wherein said underlayer is an undoped layer

4. The light emitting device according to claim 1, further comprising a contact layer of the first conductivity type provided between said underlayer and said first cladding layer.

5. The light emitting device according to claim 1, wherein said active layer has a quantum well structure including a quantum well layer.

6. The light emitting device according to claim 1, wherein said cap layer has a bandgap between those of said active layer and said second cladding layer.

7. The light emitting device according to claim 1, wherein said cap layer has an impurity concentration lower than that of said second cladding layer.

8. The light emitting device according to claim 1, wherein said buffer layer is non-single crystalline.

9. The light emitting device according to claim 1, wherein said underlayer is single crystalline.

10. A light emitting device, comprising in the following order:

a buffer layer composed of a nitride based compound semiconductor;
 a contact layer composed of a first conductivity type;
 a first cladding layer composed of a nitride based compound semiconductor of the first conductivity type;
 an active layer composed of a nitride based compound semiconductor containing indium;
 a cap layer composed of a nitride based compound semiconductor; and
 a second cladding layer composed of a nitride based compound semiconductor of a second conductivity type, said active layer having a quantum well structure including a quantum well layer and a quantum barrier layer.

11. The light emitting device according to claim 10, wherein said underlayer is an undoped layer.

12. The light emitting device according to claim 10, wherein said cap layer has a bandgap between those of said active layer and said second cladding layer.

13. The light emitting device according to claim 10, wherein said cap layer has an impurity concentration lower than

that of said second cladding layer.

14. The light emitting device according to claim 10, wherein said cap layer is a layer suppressing elimination of the indium from said active layer.

15. The light emitting device according to claim 10, wherein said buffer layer is a non-single crystalline layer.

16. The light emitting device according to claim 10, wherein said underlayer is a single crystalline layer.

17. A method of manufacturing a light emitting device, comprising, in the following order, the steps of:

forming a buffer layer composed of a nitride based compound semiconductor;
forming an underlayer composed of a nitride based compound semiconductor;
forming a first cladding layer composed of a nitride based compound semiconductor of a first conductivity type;
forming an active layer composed of a nitride based compound semiconductor containing indium;
forming a cap layer composed of AlGaIn;
forming a second cladding layer composed of a nitride based compound semiconductor of a second conductivity type at a growth temperature higher than that of said active layer.

18. The method according to claim 17, further comprising the step of forming a contact layer of the first conductivity type on said underlayer.

19. The method according to claim 18, wherein said step of forming the contact layer of the first conductivity type includes forming said contact layer of the first conductivity type at a growth temperature of not lower than 1000°C nor higher than 1200°C.

20. The method according to claim 17, wherein said step of forming the active layer includes forming a quantum well structure including a quantum well layer.

21. The method according to claim 17, wherein said step of forming the cap layer includes forming as said cap layer a layer suppressing elimination of the indium from said active layer.

22. The method according to claim 17, wherein said step of forming the active layer includes forming said active layer at a growth temperature of not lower than 700°C nor higher than 950°C.

23. The method according to claim 17, wherein said step of forming the second cladding layer includes forming said second cladding layer at a growth temperature of not lower than 1000°C nor higher than 1200°C.

24. The method according to claim 15, wherein said step of forming the cap layer includes forming said cap layer at a growth temperature substantially equal to or lower than that of said active layer.

25. The method according to claim 17, wherein said step of forming the cap layer includes forming said cap layer at a growth temperature of not lower than 700°C nor higher than 950°C.

26. A method of manufacturing a light emitting device, comprising, in the following order, the steps of:

forming a buffer layer composed of a nitride based compound semiconductor;
forming an underlayer composed of a nitride based compound semiconductor;
forming a contact layer composed of a first conductivity type;
forming a first cladding layer composed of a nitride based compound semiconductor of the first conductivity type;
forming an active layer having a quantum well structure including a quantum well layer and a quantum barrier layer and composed of a nitride based compound semiconductor containing indium;
forming a cap layer composed of a nitride based compound semiconductor;
forming a second cladding layer composed of a nitride based compound semiconductor of a second conductivity type at a growth temperature higher than that of said active layer.

27. The method of manufacturing a light emitting device according to claim 26, wherein said step of forming the contact

layer of the first conductivity type includes forming said contact layer of the first conductivity type at a growth temperature of not lower than 1000°C nor higher than 1200°C.

5 28. The method of manufacturing a light emitting device according to claim 26, wherein said step of forming the cap layer includes forming as said cap layer a layer suppressing elimination of the indium from said active layer.

29. The method of manufacturing a light emitting device according to claim 26, wherein said step of forming the active layer includes forming said active layer at a growth temperature of not lower than 700°C nor higher than 950°C.

10 30. The method according to claim 26, wherein said step of forming the second cladding layer includes forming said second cladding layer at a growth temperature of not lower than 1000°C nor higher than 1200°C.

15 31. The method according to claim 26, wherein said step of forming the cap layer includes forming said cap layer at a growth temperature substantially equal to or lower than that of said active layer.

32. The method according to claim 26, wherein said step of forming the cap layer includes forming said cap layer at a growth temperature not lower than 700°C nor higher than 950°C.

20

25

30

35

40

45

50

55

FIG. 2

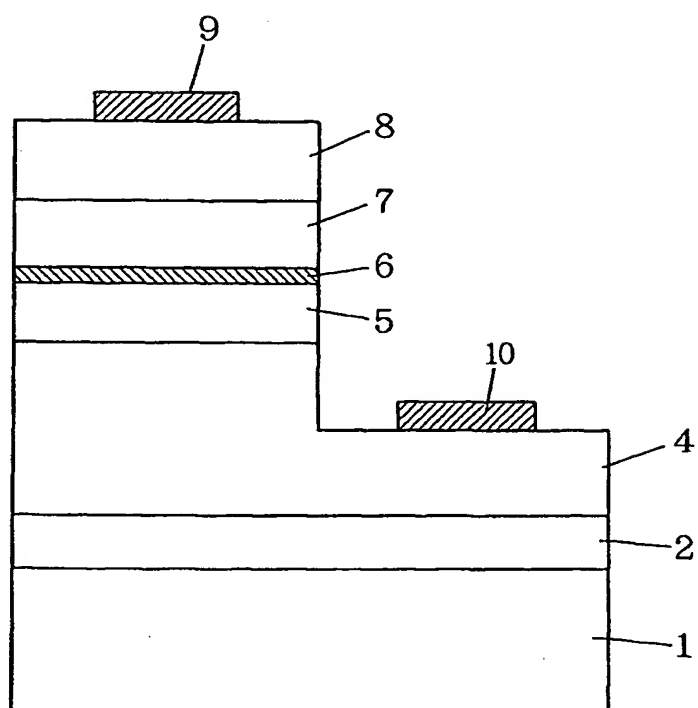


FIG. 3

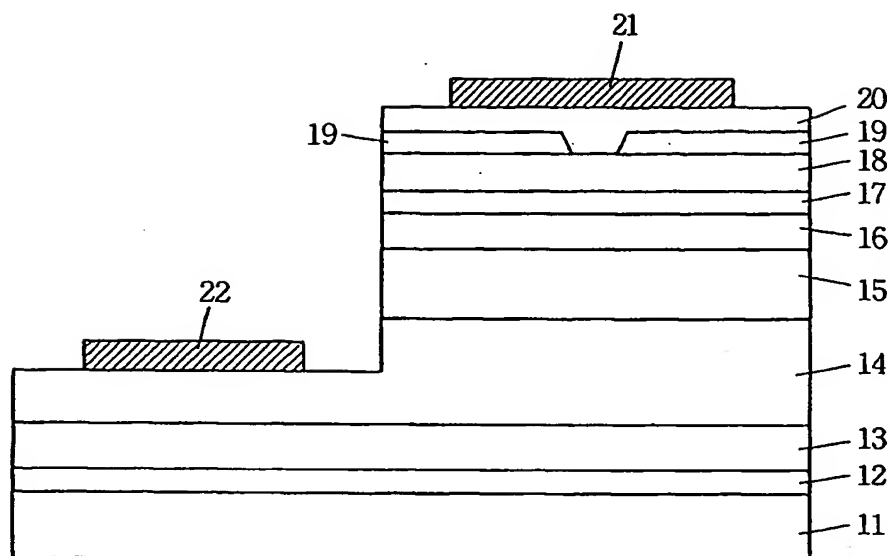


FIG. 4

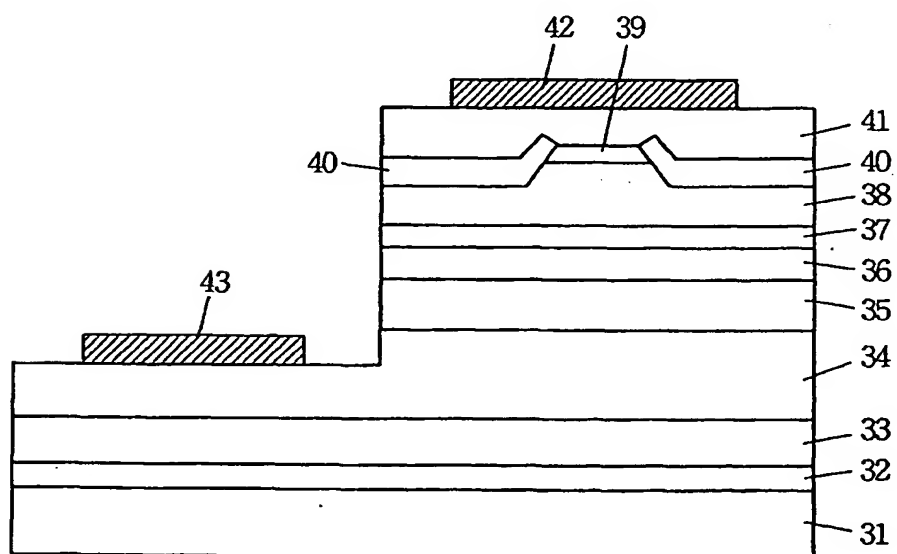


FIG. 5

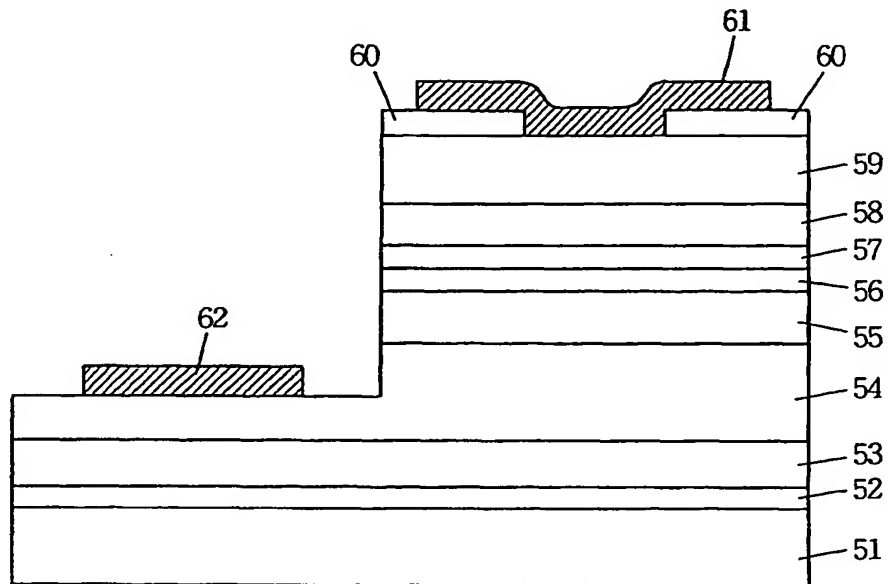


FIG. 6

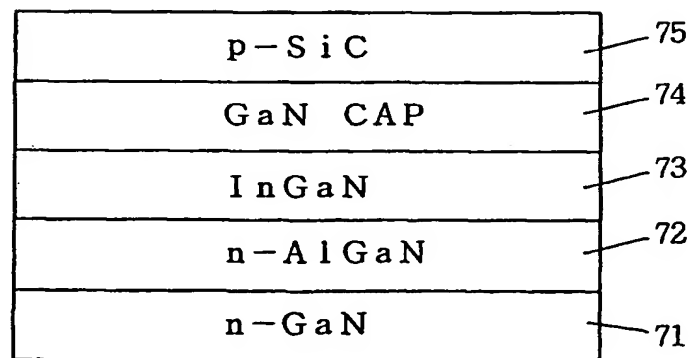


FIG. 7


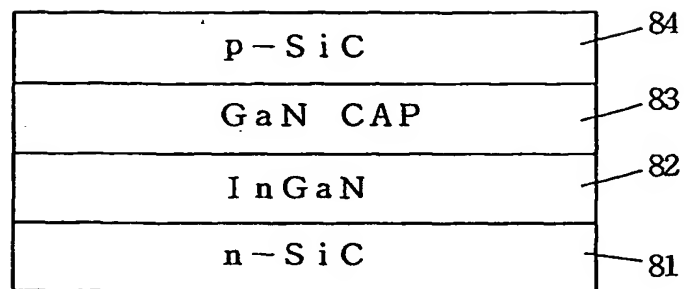


FIG. 8



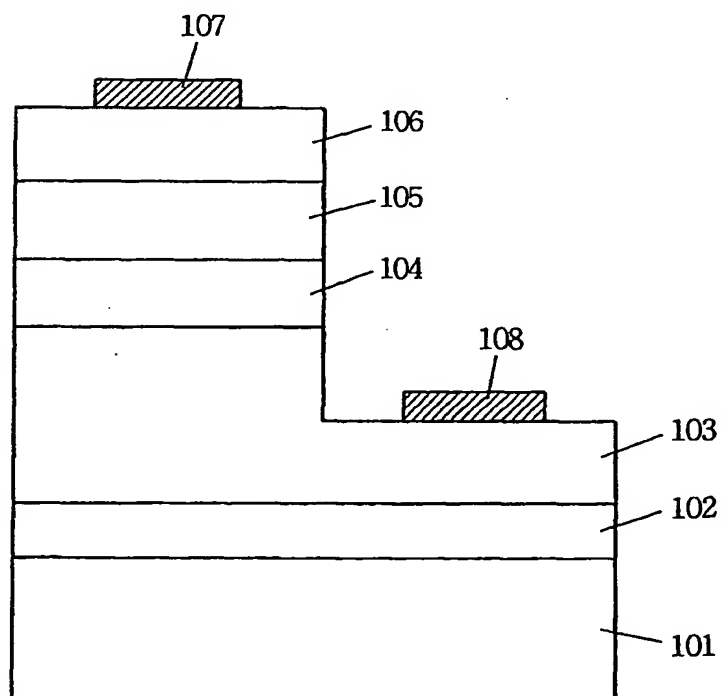

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 01 1150

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InLCI.7)
X	JP 07 249795 A (TOSHIBA CORP) 26 September 1995 (1995-09-26) * example 2 *	1-32	H01L33/00 H01S5/323
E	-& US 5 656 832 A (TOSHIBA CORP) 12 August 1997 (1997-08-12) * column 10, line 4 - column 12 *	1-32	
X	NAKAMURA S: "III-V Nitride-based LEDs" DIAMOND AND RELATED MATERIALS, vol. 5, 1 April 1996 (1996-04-01), pages 496-500, XP000627554 ISSN: 0925-9635	1,2,4-16	
A	* page 498, right-hand column, paragraph 3 - page 499, left-hand column *	17,18, 20,21, 26,28	
X	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 01, 28 February 1995 (1995-02-28) & JP 6 283825 A (TOYODA GOSEI CO LTD), 7 October 1994 (1994-10-07) * paragraphs '0002! - '0013! *	1,4-10, 12-16	
A	EP 0 497 350 A (NICHIA CHEM IND) 5 August 1992 (1992-08-05) * the whole document *	1	TECHNICAL FIELDS SEARCHED (Int.CI.7) H01L
P,X	EP 0 716 457 A (NICHIA CHEM IND) 12 June 1996 (1996-06-12) * column 17, line 24 - column 36 *	1,2,5-32	
P,X	JP 08 293643 A (SHARP CORP) 5 November 1996 (1996-11-05) * the whole document *	1-32	
E	-& US 5 780 876 A (SHARP CORP) 14 July 1998 (1998-07-14) * column 3, line 25 - column 9 *	1,2,5-32	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 13 July 2004	Examiner van der Linden, J.E.
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application I: document cited for other reasons &: member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 01 1150

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-07-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 7249795	A	26-09-1995	JP 3325380 B2	17-09-2002
			US 5656832 A	12-08-1997
			US 5909040 A	01-06-1999
			US 5929466 A	27-07-1999
US 5656832	A	12-08-1997	JP 3325380 B2	17-09-2002
			JP 7249795 A	26-09-1995
			JP 3244980 B2	07-01-2002
			JP 8186332 A	16-07-1996
			US 5909040 A	01-06-1999
			US 5929466 A	27-07-1999
JP 6283825	A	07-10-1994	NONE	
EP 0497350	A	05-08-1992	JP 4297023 A	21-10-1992
			JP 8008217 B	29-01-1996
			DE 69203736 D1	07-09-1995
			DE 69203736 T2	18-04-1996
			EP 0497350 A1	05-08-1992
			KR 9506968 B1	26-06-1995
EP 0716457	A	12-06-1996	US 5290393 A	01-03-1994
			CN 1426119 A	25-06-2003
			CN 1132942 A ,B	09-10-1996
			EP 0716457 A2	12-06-1996
			JP 2976951 B2	10-11-1999
			JP 10093138 A	10-04-1998
			JP 2780691 B2	30-07-1998
			JP 8316528 A	29-11-1996
			JP 11243227 A	07-09-1999
			US 5777350 A	07-07-1998
			US 2001030318 A1	18-10-2001
			US 2002167019 A1	14-11-2002
			JP 3141824 B2	07-03-2001
			JP 10084134 A	31-03-1998
			JP 2735057 B2	02-04-1998
			JP 8228025 A	03-09-1996
			JP 11261108 A	24-09-1999
			JP 9036430 A	07-02-1997
			JP 3433730 B2	04-08-2003
			JP 2001119069 A	27-04-2001
			JP 2002141553 A	17-05-2002
			JP 2004031990 A	29-01-2004
JP 8293643	A	05-11-1996	US 5780876 A	14-07-1998
			US 5866440 A	02-02-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 01 1150

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-07-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5780876	A	14-07-1998	JP 8293643 A	05-11-1996
			US 5866440 A	02-02-1999

EPO FORM P/459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82